

Authorised Distributors:-

ASH & ALAIN INDIA PVT LTD

S-100, F.I.E.E., Okhla Industrial Area, Phase-ii, New Delhi-110020(India)

Tel : 011-43797575 Fax : 011-43797574 E-mail : sales@ashalain.com

Long Sensing-distance Inductive Proximity Sensor

TL-L

CSM_TL-L_DS_E_3_1


Differential Coil Sensor for Long-distance Detecting (100 mm) for both Ferrous and Non-ferrous Substances

- Models also available for use under water.



Be sure to read Safety Precautions on page 4.

Ordering Information

Appearance	Sensing distance	Output configuration	Model
Cylindrical (flat surface installation)	 100 mm	Current output	TL-L100-7 1M

Note: The TL-L100-10 is also available for use under water (JIS0920: Withstand pressure of 0.39 MPa).


Ratings and Specifications

Item	Output specifications	Current output
	TL-L100-7	
Sensing distance	100 mm ±10%	
Set distance	0 to 80 mm	
Differential travel	15% max. of sensing distance	
Detectable object	Ferrous metal and non-ferrous metal	
Standard sensing object	Iron, 200 × 200 × 1 mm	
Response time	100 ms max.	
Power supply voltage (operating voltage range)	10 to 30 VDC including 10% ripple (p-p)	
Current consumption	40 mA DC max.	
Control output	200 mA DC max. (residual voltage: 1 V max.)	
Indicators	Operation indicator (red)	
Operation mode (with sensing object approaching)	NO; For details, refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 3.	
Protection circuits	Reverse polarity protection, Surge suppressor	
Ambient temperature range	Operating/Storage: -25 to 55°C (with no icing or condensation)	
Ambient humidity range	Operating/Storage: 35% to 95% (with no condensation)	
Temperature influence	±30% max. of sensing distance at 20°C in the temperature range of -10 to 40°C	
Voltage influence	±5% max. of sensing distance at rated voltage in rated voltage ±10% range	
Insulation resistance	5 MΩ min. (at 500 VDC) between current-carrying parts and case	
Dielectric strength	500 VAC, 50/60 Hz for 1 min between current-carrying parts and case	
Vibration resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions	
Shock resistance	Destruction: 200 m/s ² 10 times each in X, Y, and Z directions	
Degree of protection	IP66 (IEC)	
Connection method	Pre-wired Models (Standard cable length: 1m)	
Weight (packed state)	Approx. 1.5 kg	
Materials	Case: Aluminum die-cast, Sensing surface: Epoxy resin	
Accessories	Instruction manual	

Engineering Data (Typical)


Sensing Area

TL-L100-7

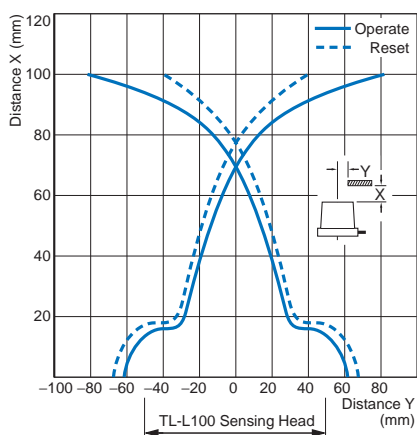







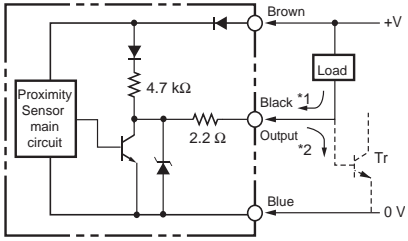


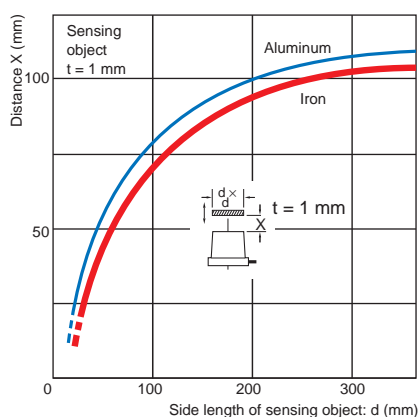Influence of Sensing Object Size and Material

TL-L100-7




I/O Circuit Diagrams

Output configuration	Model	Timing chart	Output circuit
Current output NO	TL-L100-7	<p>Sensing object</p> <p>Present </p> <p>None </p> <p>Load (between brown and black leads)</p> <p>Operate </p> <p>Reset </p> <p>Output voltage (between black and blue leads)</p> <p>High </p> <p>Low </p> <p>Operation indicator (red)</p> <p>ON </p> <p>OFF </p>	 <p>*1. Load current: 200 mA max. *2. When a transistor is connected.</p>

Connections

Connection to the S3D2 Sensor Controller

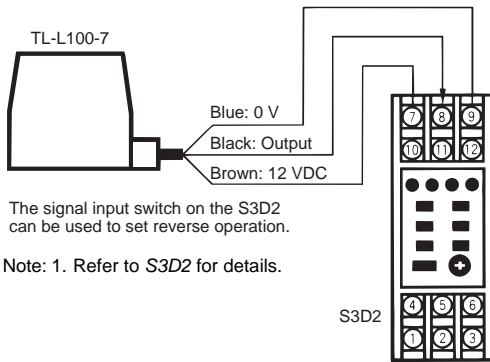

Safety Precautions

Refer to Warranty and Limitations of Liability.

WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.


Precautions for Correct Use

Do not use this product under ambient conditions that exceed the ratings.

● Design

Influence of Surrounding Metal

Separate the Sensor from surrounding metal as shown below.




Influence of Surrounding Metal

Item	Dimension (mm)
A	250
B	

Mutual Interference

When mounting more than one Sensor face-to-face or side-by-side, separate them as shown below.



Mutual Interference




Item	Dimension (mm)
A	300
B	

Dimensions


(Unit: mm)

Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

TL-L100-7

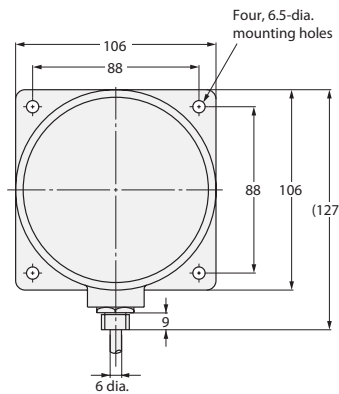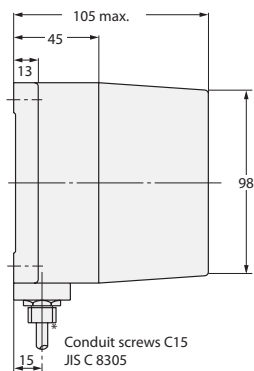

Mounting Hole Dimensions



* 6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.85 mm), Standard length: 1 m



Authorised Distributors:-

ASH & ALAIN INDIA PVT LTD

S-100, F.I.E.E., Okhla Industrial Area, Phase-ii, New Delhi-110020(India)

Tel : 011-43797575 Fax : 011-43797574 E-mail : sales@ashalain.com