

### Ultra-miniature, Highly Sensitive SPDT Relay for Signal Circuits

- Ultra-miniature at 12.5 x 7.5 x 10 mm (L x W x H).
- Wide switching power of 1 mA to 1 A.
- High sensitivity: 150-mW nominal coil power.
- Fully sealed construction.
- International 2.54-mm terminal pitch.
- Conforms to FCC Part 68 requirements for coil to contacts.



RoHS Compliant Refer to pages 16 to 17 for details.



## Ordering Information

Classification				Model
Contact form	Contact type	Contact material	Structure	
SPDT	Single crossbar	Ag + Au-Alloy	Fully sealed	G5V-1

**Note:** When ordering, add the rated coil voltage to the model number.

Example: G5V-1 12 VDC

Rated coil voltage

### Model Number Legend

G5V - □ □ VDC

1 2

1. Contact Form  
1: SPDT

2. Rated Coil Voltage  
3, 5, 6, 9, 12, 24 VDC

## Specifications

### Coil Ratings

Rated voltage		3 VDC	5 VDC	6 VDC	9 VDC	12 VDC	24 VDC
Rated current		50 mA	30 mA	25 mA	16.7 mA	12.5 mA	6.25 mA
Coil resistance		60 Ω	167 Ω	240 Ω	540 Ω	960 Ω	3,840 Ω
Coil inductance (H) (ref. value)	Armature OFF	0.05	0.15	0.20	0.45	0.85	3.48
	Armature ON	0.11	0.29	0.41	0.93	1.63	6.61
Must operate voltage		80% max. of rated voltage					
Must release voltage		10% min. of rated voltage					
Max. voltage		200% of rated voltage at 23°C					
Power consumption		Approx. 150 mW					

- Note:**
1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
  2. Operating characteristics are measured at a coil temperature of 23°C.
  3. The maximum voltage is the highest voltage that can be imposed on the relay coil.

## ■ Contact Ratings

<b>Load</b>	Resistive load ( $\cos\phi = 1$ )
<b>Rated load</b>	0.5 A at 125 VAC; 1 A at 24 VDC
<b>Contact material</b>	Ag + Au-Alloy
<b>Rated carry current</b>	2 A
<b>Max. switching voltage</b>	125 VAC, 60 VDC
<b>Max. switching current</b>	1 A
<b>Max. switching power</b>	62.5 VA, 30 W
<b>Failure rate (reference value) (See note.)</b>	1 mA at 5 VDC

**Note:** P level:  $\lambda_{60} = 0.1 \times 10^{-6}/\text{operation}$

This value was measured at a switching frequency of 120 operations/min and the criterion of contact resistance is 100  $\Omega$ . This value may vary depending on the operating environment. Always double-check relay suitability under actual operating conditions.

## ■ Characteristics

<b>Contact resistance (See note 1.)</b>	100 m $\Omega$ max.
<b>Operate time (See note 2.)</b>	5 ms max. (approx. 2.5 ms)
<b>Release time (See note 2.)</b>	5 ms max. (approx. 0.9 ms)
<b>Max. operating frequency</b>	Mechanical: 36,000 operations/hr Electrical: 1,800 operations/hr (under rated load)
<b>Insulation resistance (See note 2.)</b>	1,000 M $\Omega$ min. (at 500 VDC between coil and contacts, at 250 VDC between contacts of same polarity.)
<b>Dielectric strength</b>	1,000 VAC, 50/60 Hz for 1 min between coil and contacts 400 VAC, 50/60 Hz for 1 min between contacts of same polarity
<b>Impulse withstand voltage</b>	1,500 V (10 x 160 $\mu$ s) between coil and contacts (conforms to FCC Part 68)
<b>Vibration resistance</b>	Destruction: 10 to 55 to 10 Hz, 1.65-mm single amplitude (3.3-mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 1.65-mm single amplitude (3.3-mm double amplitude)
<b>Shock resistance</b>	Destruction: 1,000 m/s <sup>2</sup> Malfunction: 100 m/s <sup>2</sup>
<b>Endurance</b>	Mechanical: 5,000,000 operations min. (at 18,000 operations/hr) Electrical: 100,000 operations min. (under rated load, at 1,800 operations/hr)
<b>Ambient temperature</b>	Operating: -40°C to 70°C (with no icing)
<b>Ambient humidity</b>	Operating: 5% to 85%
<b>Weight</b>	Approx. 2 g

**Note:** The values here are initial values.

**Note:** 1. The contact resistance was measured with 10 mA at 1 VDC with a voltage drop method.

2. Values in parantheses are actual values.

3. The insulation resistance was measured with a 500-VDC megohmmeter between coil and contacts and a 250-VDC megohmmeter between contacts with the same polarity applied to the same parts as those used for checking the dielectric strength.


## ■ Approved Standards

UL1950 (File No. E41515)/CSA C22.2 No.0, No.14 (File No. LR31928)


Model	Contact form	Coil ratings	Contact ratings
G5V-1	SPDT	3 to 24 VDC	0.5 A, 125 VAC (general use) 0.3 A, 110 VDC (resistive load) 1 A, 30 VDC (resistive load)

# Engineering Data


## Maximum Switching Power

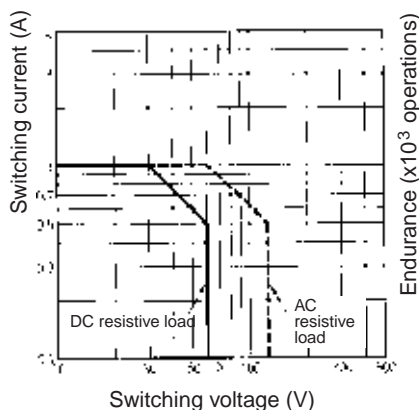

## Endurance

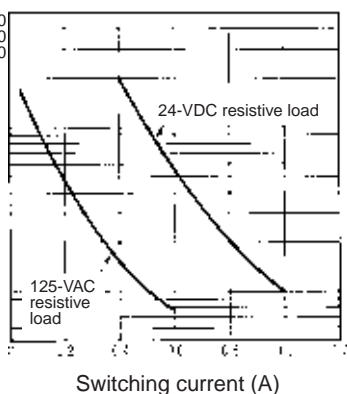


## Ambient Temperature vs. Maximum Coil Voltage

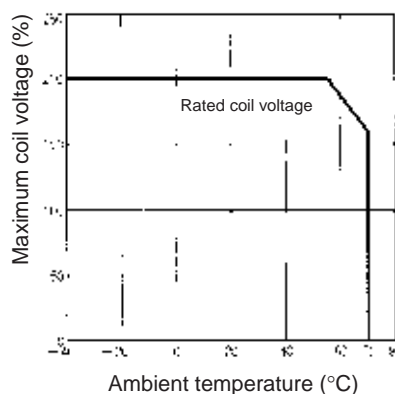


**Note:** The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

# Dimensions


- Note:**
1. All units are in millimeters unless otherwise indicated.
  2. Numbers in parentheses are reference values.
  3. Tolerance:  $\pm 0.1$
  4. Orientation marks are indicated as follows:

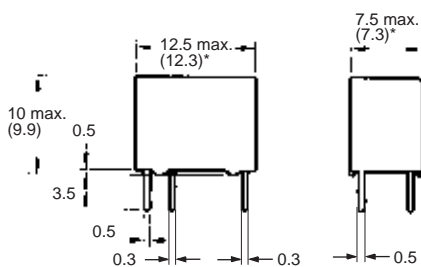

## Terminal Arrangement/ Internal Connections (Bottom View)



## Mounting Holes (Bottom View)

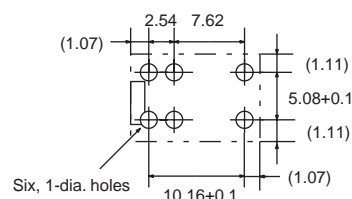

# Precautions

### Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts, because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. Be sure to use a fail-safe circuit design that provides protection against contact failure or coil burnout.

### Relay Handling

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. K048-E1-02



3gfZad[eW 6[efdTgfade,Ž

ASH & ALAIN INDIA PVT LTD

S-100, F.I.E.E., Okhla Industrial Area, Phase-ii, New Delhi-110020(India)

Tel : 011-43797575 Fax : 011-43797574 E-mail : sales@ashalain.com